



Teak Rough Sawn Timber Quality Description

Premium, AB, BB, BC and C





Description of goods
Rough sawn Teak (Tectona Grandis), KD with m.c. 10/12%
Premium Grade
Side 1: 100% Heartwood, free from wormholes and pith. Unlimited presence of sound knots. Side 2: 100% Heartwood, free from wormholes and pith. Unlimited presence of sound knots. Allowed maximum 3 dead knots with small cracks.





hovotrade

Description of goods

Rough sawn Teak (*Tectona Grandis*), KD with m.c. 10/12%

AB Grade

Free from wormholes, blue stain, wane and pith. Unlimited presence of sound knots.
Allowed maximum 3 dead knots with small cracks per piece.

Presence of Heartwood and Sapwood.

Side A: 100% Heartwood.

Side B: 20% and up of Heartwood presence.



Side A


Side B



STANDARD SIZE FOR ABOVE GRADES - MM		
THICKNESS	WIDTH	LENGTH
20 - 40	150 - 200	2000- 2300
20 - 40	150 - 200	1600 - 1900
20 - 40	150 - 200	1200 - 1500
20 - 40	150 - 200	600 - 1100
THICKNESS	WIDTH	LENGTH
20 - 40	100 - 145	2000- 2300
20 - 40	100 - 145	1600 - 1900
20 - 40	100 - 145	1200 - 1500
20 - 40	100 - 145	600 - 1100



Description of goods
Rough sawn Teak (Tectona Grandis). KD with m.c. 10/12% OR Air Dried (AD)
B/B Grade
Free from wormholes, blue stain, wane and pith. Unlimited presence of sound knots. Allowed maximal 3 knots with small cracks per piece. Heartwood and sapwood presence Side B1: 60% and up of Heartwood presence. Side B2: 20% and up of Heartwood presence.

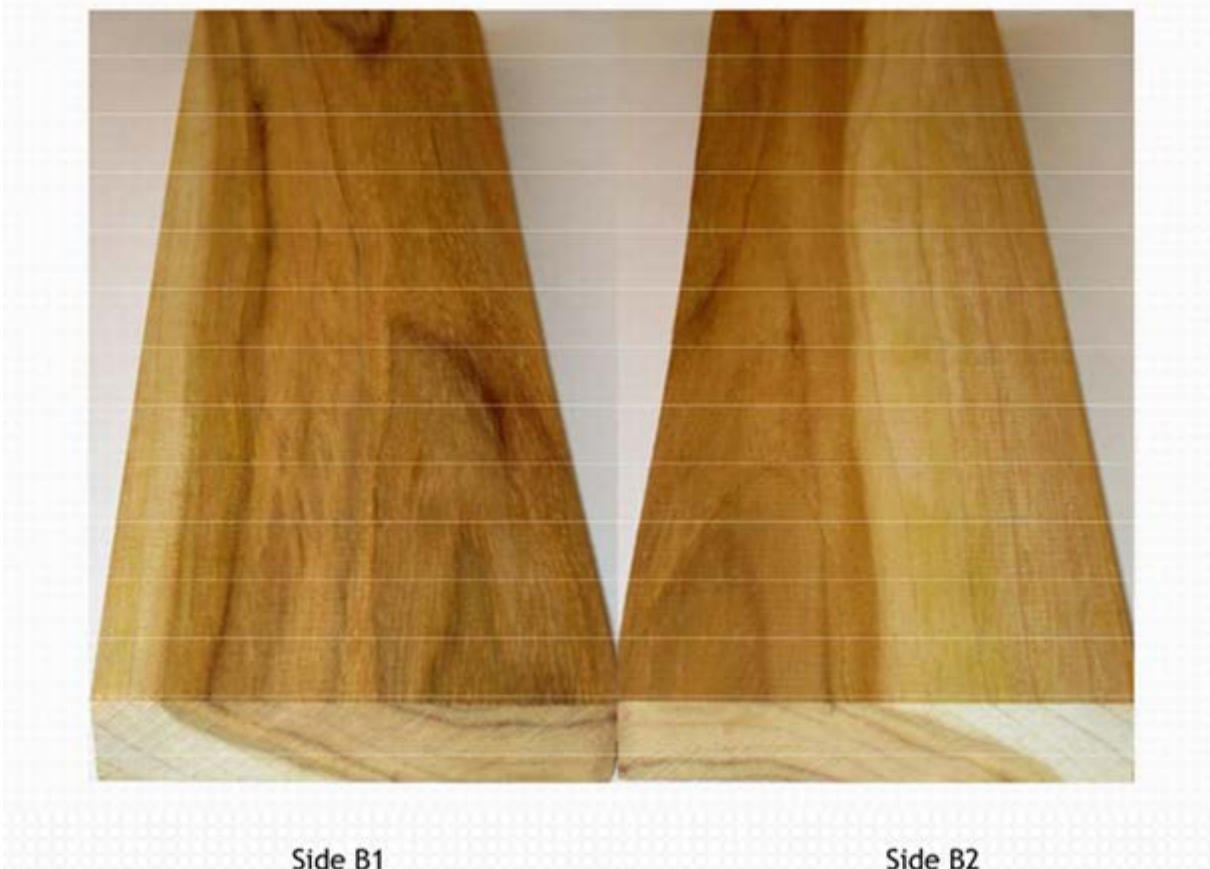



hovotrade

Description of goods

Rough sawn Teak (Tectona Grandis), KD with m.c. 10/12% OR Air Dried (AD)

B/C Grade

Free from wormholes. Allowed blue stain, maximal 3 knots per piece, wane until 50% of the length from the piece and superficial pith on the side C .

Presence of Heartwood and sapwood.

Side B: 60% and up of Heartwood presence.

Side C: 20% and up of Heartwood presence.



Side B

Side C



Description of goods
Rough sawn Teak (<i>Tectona Grandis</i>), KD with m.c. 10/12% OR Air Dried (AD)
C Grade
Wormholes, blue stain, knots, wane and pith are allowed. Unlimited presence of sapwood.



Side 1

Side 2



STANDARD SIZES		
THICKNESS	WIDTH	LENGTH
20 - 40	152,4 + 177,8	2100 - 2300
20 - 40	152,4 + 177,8	1800 - 2000
20 - 40	152,4 + 177,8	1200 - 1700
20 - 40	152,4 + 177,8	600 - 1100
THICKNESS	WIDTH	LENGTH
20 - 40	101,6 + 127	2100 - 2300
20 - 40	101,6 + 127	1800 - 2000
20 - 40	101,6 + 127	1200 - 1700
20 - 40	101,6 + 127	600 - 1100
THICKNESS	WIDTH	LENGTH
20 - 40	50,8 + 76,2	2100 - 2300
20 - 40	50,8 + 76,2	1800 - 2000
20 - 40	50,8 + 76,2	1200 - 1700
20 - 40	50,8 + 76,2	600 - 1100